



■ Divot Bare Fiber Alignment Device (Tester)

The Divot™ Bare Fiber Alignment Device (Tester) is a device that quickly connects unterminated (bare) fiber to OTDR's or other fiber optic test equipment. Simply strip the fiber, cleave or scribe and insert into the Divot Module. In an instant, the fiber is connected to your OTDR with low loss and low reflectance.



Parts included:

- Divot™ Module (A) with 1 Meter Patch Cable (B)
- 2 Sealed OCC Cartridges (C)
- Clean-out Wire (D)
- Carry Case (E)
- Dust Cap for end of OCC cartridge when loaded in Divot™ Module (not shown)

Items not included which may be required:

- Optical Strippers
- Scribe or Cleaver
- Cleaning Wipes/Pads
- Dead Zone Eliminator® OTDR Launch Cable

■ Loading an OCC Cartridge

⚠ Before you begin: Load Cartridge


An OCC cartridge needs to be loaded into the Divot™ Module before use. Two sealed cartridges are included in the case.



1 You do not need to remove the Divot™ module from the patch cable when loading a cartridge.



2 Unscrew and remove the End Cap which will expose the sleeve.



3 Remove the two plastic tabs (located on each end) from one of the OCC cartridges included. Leave remaining cartridge sealed until ready for use.



4 After removing the tabs from the OCC cartridge, push the larger end into the sleeve.




5 Screw on the End Cap until it stops. The Divot™ Module is now loaded and ready for use. Place the dust cap included in the case (not shown) onto the end of the cartridge protruding from the Divot™ module when storing the unit.

■ Instructions

- Connect patch cable to OTDR or test equipment.
- Break out a few inches of the fiber to be tested down to 250uM buffer. Strip fiber down to 125uM cladding. Cleave (optional) or Scribe and break fiber leaving at minimum of 3/4" of fiber. Clean or wipe off fiber if needed.
- Insert your prepared bare fiber end into the round opening on the end of the OCC cartridge protruding from the Divot™ module.

The bare fiber will be stopped by the attached patch cable assembly. If a connection is not made on the first insertion, pull the fiber back slightly into the module and push forward again. If using uncleaved fiber and are unable to get a successful connection after a few attempts, remove the fiber and rebreak or cut the fiber again.

- Proceed with testing.

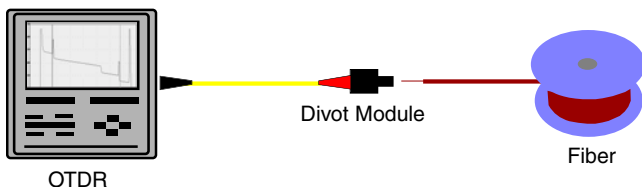

⚠ **Caution:** Always wear protective eyewear when working with bare or active fiber. Never look into the end of the Divot™ Module when patch cable is connected to active test equipment.

❓ Questions? Please contact Customer Service at 1-800-232-5487 or visit www.fiberplus.com.

■ Maintenance

Occasionally you may have to clean the connector on the patch cable (identified with the red boot) and/or both ends of the ferrule assembly inside the Divot™ Module. The ferrule assembly can be removed from the bulkhead housing and cleaned or immersed in alcohol. To remove the Divot™ Module from the Patch Cable simply loosen the LiteLOCK® dial by rotating it slightly to the left and pull the connector out from the interface. To reconnect the patch cable, insert the connector with the red boot into the Universal Bulkhead Housing. Push the ferrule of the connector into the 2.5mm interface and secure by rotating the LiteLOCK® dial to the right. Do not overtighten. The LiteLOCK® dial can also be unscrewed from the bulkhead housing in order to clean or replace the zirconia sleeve. Over time, especially if inserting non-cleaved fiber, the patch cable mated to the Divot™ module will wear and may need to be replaced. Additional cables are available as accessories.

If fiber happens to break off inside the ferrule assembly, clean-out wire is supplied to remove any debris. Disconnect the patch cable from the Divot™ Module by rotating the LiteLOCK® dial slightly to the left and pull the connector out from the interface. Remove the end cap, OCC cartridge and sleeve. Pull the ferrule assembly out of the bulkhead housing. Insert clean-out wire into the ferrule to clean out any broken fiber or debris. Reassemble the Divot™ Module and insert the connector with the red boot from the patch cable into the Universal Bulkhead Housing and secure by rotating the LiteLOCK® dial to the right. Do not overtighten.



■ Cartridge Replacement

The OCC cartridge is filled with optical coupling compound and under normal use will typically produce a minimum of 500 insertions. The cartridge needs to be replaced when you start to experience inconsistent launches. In some cases, especially over prolonged use, debris can build up in the cavity on the tip of the Ferrule Assembly which will cause inconsistency in the connection. Before replacing the cartridge, clean out the ferrule assembly. Please refer to the front of this sheet for instructions on how to replace (load) the Optical Compound Cartridge.

■ Specifications

Fiber type: Singlemode 9/125uM, Multimode 62.5/125uM or Multimode 50/125uM
Cable length: 1 meter
Number of insertions (Typical): 1000 min. (500 min. per cartridge, 2 cartridges included)
Insertion loss (Typical): < 0.5 dB (uncleaved fiber < 0.8dB)
Back Reflection (Typical): < 45 dB
Operating temp.: 10° C to 30° C

■ Accessories

DVT-RC3 Divot™ Replacement OCC Cartridges (3 pack)
DVT-RC12 Divot™ Replacement OCC Cartridges (12 pack)
Divot™ Patch Cable Assembly
Dead Zone Eliminator® Launch Cable (Box) for use with OTDR's

Products protected by numerous US and international patents and patents pending. Fiber Plus Int reserves the right to improve, enhance or modify the features and specifications of products without prior notification. © 2006 Fiber Plus International, USA. Designed and manufactured by Fiber Plus International, USA.



Fiber Plus International
Fiber Optic Connection Technology

We make connections®

10 Buist Road, Suite 403, Milford PA 18337, USA
Phone: 1-800-232-5487 or (570) 296-5124 Fax: (570) 296-8606
Internet: www.fiberplus.com